


LD-P Spring Mounts

LIVA-EP
利瓦环保

Feature:

- ★ Mainly used with an inertial base as an open-type spring mount.
- ★ Easy to install, allows easy inspection since the spring.
- ★ Deflection can be visually checked.
- ★ With a spring deflection of 25mm~75mm.
- ★ Used for equipment that needs maximum isolation.
- ★ Quick and easy installation.
- ★ Heavy-duty vibration isolation.

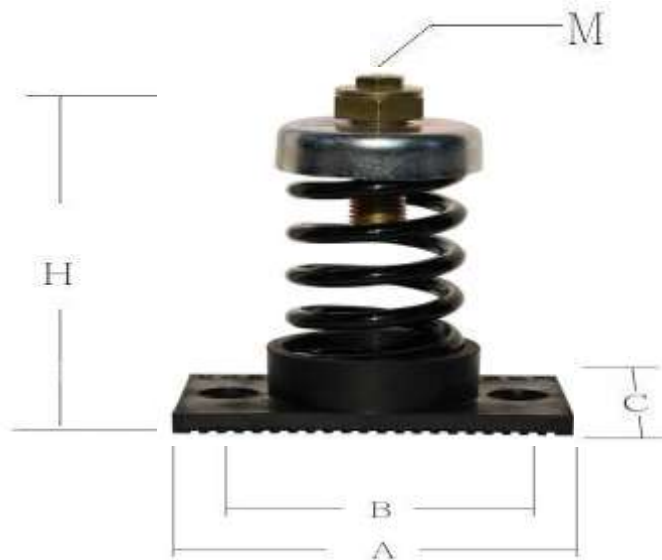

Applications:

Air blowers
Pump Base

Type	Rated Capacity KG	Spring Rate KG/mm	Dimensions ($\pm 2\text{mm}$)			
			A	B	C	H
LD-020-P	10~20	1.3	135	102	75	105
LD-030-P	20~30	2				
LD-050-P	30~50	3.3				
LD-070-P	50~80	5.3				
LD-090-P	80~100	6.6				
LD-120-P	100~130	8				
LD-150-P	130~150	10				
LD-180-P	150~180	12				
LD-200-P	180~210	13.3				
LD-250-P	210~260	17.3				
LD-300-P	260~320	20				
LD-350-P	320~360	24				
LD-400-P	360~430	26.7				