

GS-1 Wire Rope Isolator

LIVA-EP
利瓦环保


Feature:

- ★ All-metal multidirectional anti-vibration/shock mounts.
- ★ Excellent reliability and long lifespan.
- ★ High damping.
- ★ Corrosion resistant.
- ★ Wide temperature range: $-180^{\circ}\text{C} \sim +300^{\circ}\text{C}$.
- ★ Great adaptability/versatility.
- ★ Customized design can be done.



Applications:

- ★ Car Equipment
- ★ Shipboard equipment
- ★ Airborne equipment
- ★ Fire and communications equipment

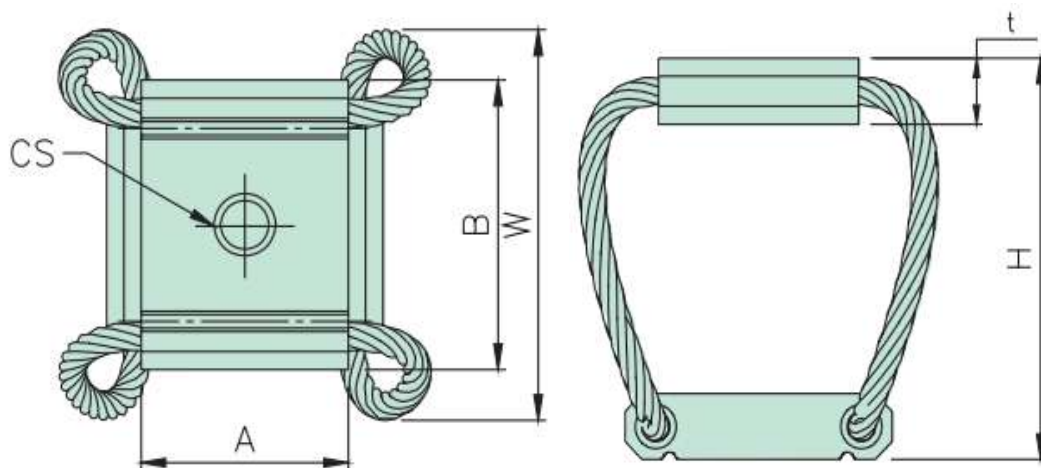

Type	Dimensions (mm)					Rated Capacity (KG)		
	A, B	W	t	H \pm 1	CS	Mz	M45	Mx
GS-1-01	10	19.8	3.5	12.7	M3	1.2	0.85	0.75
GS-1-02	14	27.9	5	21.6	M4	2.7	1.7	1.2
GS-1-03	18	34.3	6.5	25.4	M4	4.5	3	2.2
GS-1-04	20	41.9	8	25.4	M4	7.1	5.7	3.9

Type	Static Stiffness (N/mm)			Max. Dyn Deflection (mm)		
	Mz	M45	Mx	Mz	M45	Mx
GS-1-01	3.5	2.5	3.1	4	4	4
GS-1-02	7.6	4.7	4.6	8	12	10
GS-1-03	13.3	8.2	7.9	9	8	12
GS-1-04	21.6	14.6	14.6	8	8	11