

GS-2 Wire Rope Isolator

LIVA-EP
利瓦环保


Feature:

- ★All-metal multidirectional anti-vibration/shock mounts.
- ★Excellent reliability and long lifespan.
- ★High damping.
- ★Corrosion resistant.
- ★ Wide temperature range: -180°C~+300°C.
- ★Great adaptability/versatility.
- ★Customized design can be done.



Applications:

- ★Car Equipment
- ★Shipboard equipment
- ★Airborne equipment
- ★Fire and communications equipment

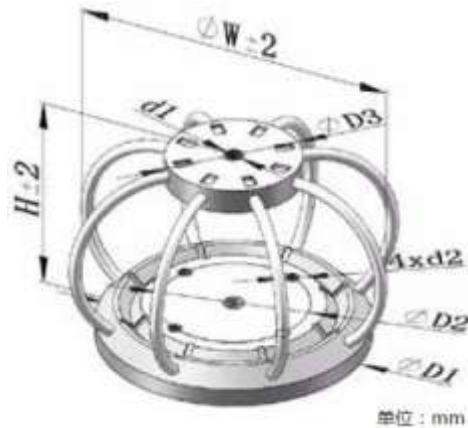

Type	Dimensions (mm)							Rated Capacity (KG)	Static Stiffness (N/mm)	Max. Dyn Deflection mm	Max. Shock (KN)
	ϕ D1	ϕ D2	ϕ D3	ϕ W	H	d1	d2				
GS-2-01	70	36	38	77	47	M6	M4	2	3.5	35	0.05
GS-2-02	70	35	52	76	37	M6	M4	5	10.5	25	0.1
GS-2-03	102	60	52	121	77	M8	M6	8	25	63	0.46
GS-2-04	102	60	64	113	62	M8	M6	13	39	48	0.7
GS-2-05	102	60	52	120	76	M8	M6	19	60	59	0.85
GS-2-06	102	60	64	120	71	M8	M6	27	72	54	1.1
GS-2-07	102	60	76	110	45	M8	M6	31	101	31	1.55
GS-2-08	102	60	76	124	62	M8	M6	41	119	45	1.8