


# GS-4 Wire Rope Isolator

LIVA-EP  
利瓦环保

## Feature:

- ★All-metal multidirectional anti-vibration/shock mounts.
- ★Excellent reliability and long lifespan.
- ★High damping.
- ★Corrosion resistant.
- ★ Wide temperature range:  $-180^{\circ}\text{C}\sim+300^{\circ}\text{C}$ .
- ★Great adaptability/versatility.
- ★Customized design can be done.

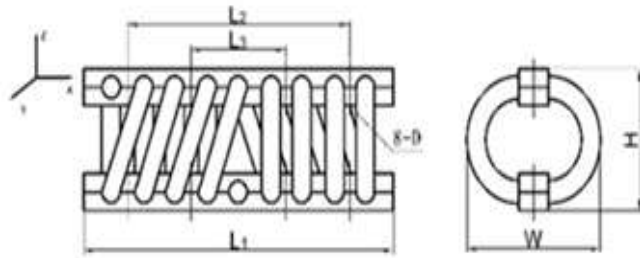

## Applications:

- ★Car Equipment
- ★Shipboard equipment
- ★Airborne equipment
- ★Fire and communications equipment

Type	Dimensions (mm)						Static Stiffness (N/mm)			Max. Shock ((kN)			Rated Capacity (kg)			Weight (KG)
	L1	L2	L3	H	W	D	$K_x$	$K_{45}$	$K_z$	$P_x$	$P_{45}$	$P_z$	$M_x$	$M_{45}$	$M_z$	
GS-4-01	146	131	-	55	60	M8	103	159	260	2.8	2.3	4	25	50	80	0.56
GS-4-02				61	67		50	116	164	1.9	1.7	2.4	12	35	50	0.6
GS-4-03				65	74		33	86	122	1.3	1.9	2.1	10	25	40	0.63
GS-4-04				69	83		22	62	88	1.4	1.3	1.6	8	20	30	0.67
GS-4-05				71	92		17	52	70	1.4	1	1.6	5	16	24	0.68
GS-4-06				73	99		14	43	65	1.2	1.1	1.3	5	12	18	0.7
GS-4-07				75	104		12	36	54	1.1	1.6	1.2	4	10	15	0.71
GS-4-08				89	111		7.7	26	39	0.6	0.8	1.2	3	8	12	0.72

# GS-4 Wire Rope Isolator

LIVA-EP

GS-4-09	178	156	66	90	105	M8	100	296	439	4.3	4.3	7.3	30	85	125	2.04
GS-4-10				95	121		70	222	317	2.8	3.4	6	22	65	110	2.2
GS-4-11				108	133		46	158	260	2.2	3	4.5	15	50	80	2.35
GS-4-12				124	144		39	114	200	2.1	2.3	4	12	40	64	2.53
GS-4-13				137	156		32	81	152	1.7	4	4.3	9	35	52	2.73
GS-4-14	216	166	71	71	84	M8	119	259	413	2.8	3	4.4	35	80	120	1.71
GS-4-15				74	89		88	239	330	3.2	2.8	4.9	25	70	100	1.75
GS-4-16				76	105		67	174	253	2.6	2.7	4.4	20	50	70	1.79
GS-4-17				83	108		49	143	225	2.4	2.8	3.9	15	45	60	1.85
GS-4-18				89	108		48	120	205	2.1	2.5	3.8	13	40	55	1.91
GS-4-19				105	121		29	80	143	2.3	2.1	2.4	8	30	40	1.97
GS-4-20	267	191	82	89	103	M10	430	1020	1800	18	13	27	150	300	500	4.1
GS-4-21				99	112		417	926	1402	13	11	19	130	250	400	4.3
GS-4-22				109	135		256	588	1063	8.1	7.6	13	70	200	300	4.5
GS-4-23				119	152		178	383	719	7	5.6	11	50	130	220	4.9
GS-4-24				127	165		127	299	507	8.3	7.6	13	35	110	170	5.3
GS-4-25	370	268	114	133	140	M16	851	1114	2470	22	27	31	275	365	686	11
GS-4-26				152	165		597	720	1474	26	26	33	198	252	467	12
GS-4-27				159	178		469	590	1218	18	20	31	160	216	446	13
GS-4-28				191	210		291	489	728	22	24	27	96	240	345	15
GS-4-29				216	235		161	303	607	20	21	19	59	140	280	17