

LW Rubber Mounts

LIVA-EP
利瓦环保


Feature:

- ★ Rubber and iron pieces by special treatment, strong bond.
- ★ The Simple structure of the PDR rubber mount make it easy to install.
- ★ Use of natural rubber material, solid structure, good weather resistance. Rubber hardness 40,60,75, other hardness and size can be customized.
- ★ while the frequency of the vibration is under 15Hz(900RPM),this mount can absorb 90% of the vibration .
- ★ The load range from 12KG to 1200KG



Applications:

- ★ Ruggedized installations、 Industrial machinery、 Generators、 Blowers, pumps, and compressors、 Condensers

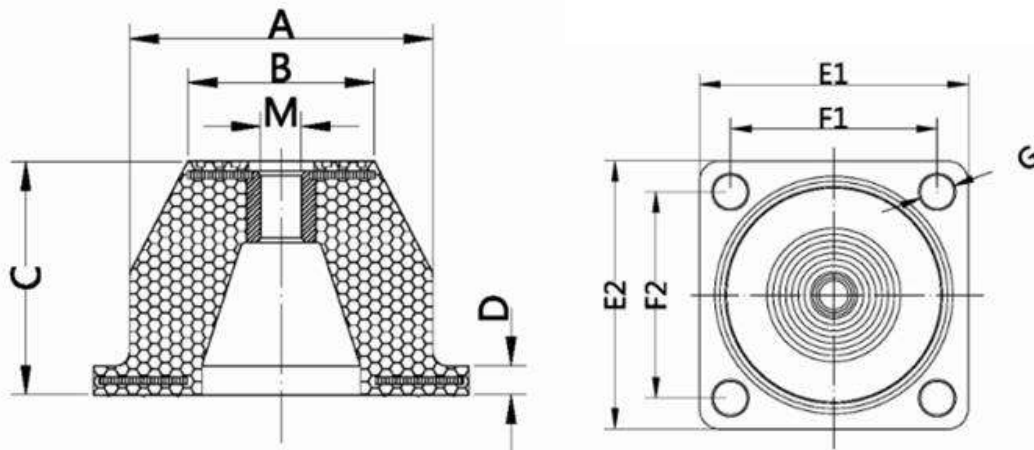

型号	尺寸 (mm)								最佳载荷 KG			最佳压缩量 mm
	A	B	C	D	E	F	G	M	40°	60°	75°	
LW-10060	86	58	60	10	100	76	12	12	60	90	130	5
LW-13080	105	64.5	80	10	130	100	16	16	110	190	235	5
LW-180100	156	100	100	10	180	148	17	16	190	275	410	5