

# LRB-D Rubber Mounts


LIVA-EP  
利瓦环保

## Feature:

- ★ Reduction of structure-borne noise.
- ★ Reduction of vibration from rotating or reciprocating machinery
- ★ Sturdy, reliable construction.
- ★ Reduce effects of misalignment and distortion.
- ★ Available in a wide load range.
- ★ Low cost.
- ★ Prevent shock and vibration damage to sensitive equipment.
- ★ Resist oil, ozone and caustic materials.
- ★ Wide temperature range:  $-40^{\circ}\text{C} \sim 120^{\circ}\text{C}$ .

## Applications:

HVAC equipment、Relays and control panels、Pumps and Compressors、Machinery

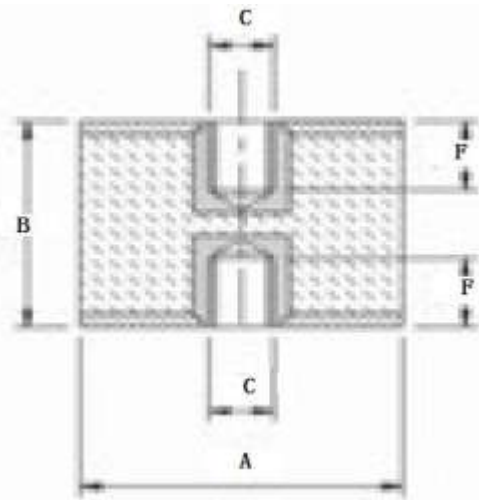

Type	Dimensions (mm)			Capacity KG		Optimum reduction mm
	A	B	C	40°	60°	
LRB-D10*10	10	10	M3/M4	5	10	2
LRB-D10*15	10	15	M3/M4	5	10	2
LRB-D15*15	15	15	M4/M5	10	18	2
LRB-D15*20	15	20	M4/M5	10	18	2
LRB-D15*30	15	30	M4/M5	10	18	2
LRB-D20*15	20	15	M6	13	25	2
LRB-D20*20	20	20	M6	13	25	2
LRB-D20*25	20	25	M6	15	28	2
LRB-D20*30	20	30	M6	22	35	2.5
LRB-D25*20	25	20	M6/M8	17	33	2
LRB-D25*25	25	25	M6/M8	17	33	2
LRB-D25*30	25	30	M6/M8	21	41	2.5
LRB-D30*20	30	20	M8	22	40	2
LRB-D30*25	30	25	M8	22	40	2
LRB-D30*30	30	30	M8	28	50	2.5

# LRB-D Rubber Mounts

LIVA-EP  
利瓦环保

LRB-D30*40	30	40	M8	28	50	2.5
LRB-D40*25	40	25	M8/M10	26	48	2
LRB-D40*30	40	30	M8/M10	32	60	2.5
LRB-D40*40	40	40	M8/M10	38	72	3
LRB-D50*25	50	25	M10/M12	30	56	2
LRB-D50*30	50	30	M10/M12	38	70	2.5
LRB-D50*35	50	35	M10/M12	38	70	2.5
LRB-D50*40	50	40	M10/M12	45	85	3
LRB-D50*45	50	45	M10/M12	45	85	3
LRB-D50*50	50	50	M10/M12	45	85	3
LRB-D60*30	60	30	M10/M12	60	110	2.5
LRB-D60*35	60	35	M10/M12	60	110	2.5
LRB-D60*40	60	40	M10/M12	60	110	2.5
LRB-D60*45	60	45	M10/M12	72	132	3
LRB-D60*50	60	50	M10/M12	72	132	3
LRB-D60*60	60	60	M10/M12	72	132	3
LRB-D70*40	70	40	M12/M16	135	240	3
LRB-D70*50	70	50	M12/M16	135	240	3
LRB-D70*55	70	55	M12/M16	160	280	3.5
LRB-D70*65	70	65	M12/M16	160	280	3.5
LRB-D75*40	75	40	M12/M16	150	270	3
LRB-D75*45	75	45	M12/M16	150	270	3
LRB-D75*50	75	50	M12/M16	150	270	3
LRB-D75*55	75	55	M12/M16	175	315	3.5
LRB-D80*40	80	40	M12/M16	150	280	3
LRB-D80*50	80	50	M12/M16	175	280	3
LRB-D80*60	80	60	M12/M16	205	325	3.5
LRB-D80*80	80	80	M12/M16	235	370	4
LRB-D100*30	100	30	M16	190	350	2.5
LRB-D100*40	100	40	M16	230	420	3
LRB-D100*45	100	45	M16	230	420	3
LRB-D100*50	100	50	M16	230	420	3
LRB-D100*55	100	55	M16	270	490	3.5
LRB-D100*60	100	60	M16	310	560	4
LRB-D100*75	100	75	M16	310	560	4
LRB-D100*100	100	100	M16	390	700	5
LRB-D150*75	150	75	M16/M20	750	1400	5