

LRA Rubber Mounts


LIVA-EP
利瓦环保

Feature:

- ★Reduction of structure-borne noise.
- ★Reduction of vibration from rotating or reciprocating machinery
- ★Sturdy, reliable construction.
- ★Reduce effects of misalignment and distortion.
- ★Available in a wide load range.
- ★Low cost.
- ★Prevent shock and vibration damage to sensitive equipment.
- ★Resist oil, ozone and caustic materials.

Applications:

HVAC equipment、Relays and control panels、Pumps and Compressors、Machinery

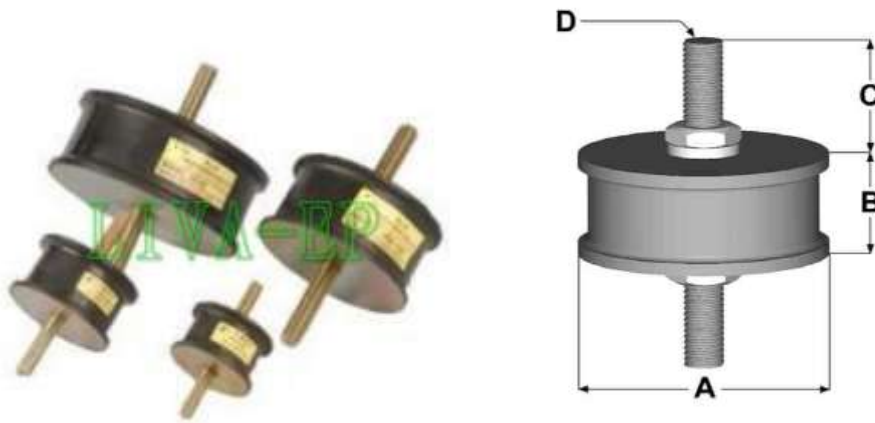

Type	Dimensions (mm)				Capacity (KG)	
	A	B	C	D	Min	Max
LRA-40	42	28	28	M8	20	100
LRA-60	60	37	37	M10	100	200
LRA-80	80	46	47	M12	200	500
LRA-120	122	60	54	M16	500	1000
LRA-160	162	68	64	M16	1000	1500
LRA-200	202	80	76	M20	1500	2500

