

LM Rubber Mounts

LIVA-EP
利瓦环保


Feature:

- ★ The upper and lower steel plate design, the shock absorber uniform force, stability, shock absorption effect.
- ★ Wide-range load with low natural frequency.
- ★ Resist oil, ozone and caustic materials.
- ★ Quick and easy installation.
- ★ Wide temperature range: -40°C~120°C.



Applications:

- ★ Ruggedized installations, Industrial machinery, Generators, Blowers, pumps, and compressors, Condensers

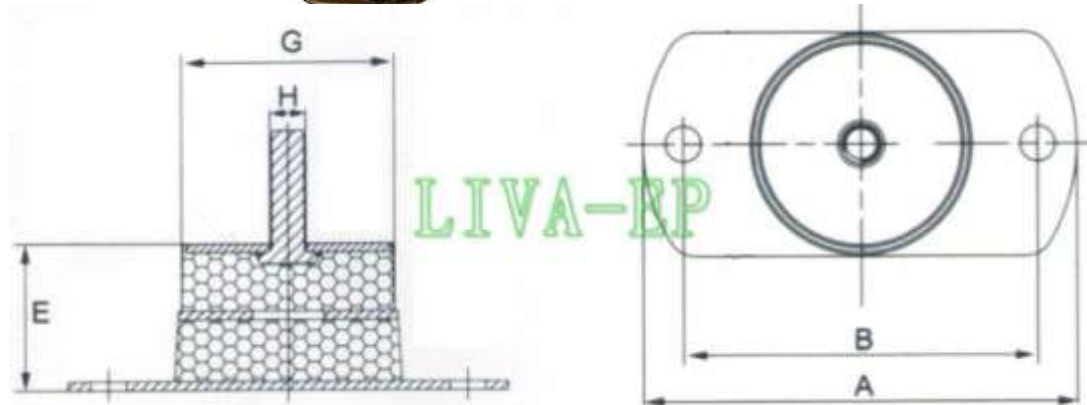

Type	Dimensions mm					Rubber hardness	Spring Rate KG/mm	Capacity KG	Optimum reduction mm
	A	B	E	G	H				
LM-70	147	120	50	70	M12	40	60	325	5
						60	83	413	5
						70	103	515	5
LM-88	140	112	50	88	M12	40	55	440	8
						60	90	720	8
						70	130	1040	8
LM-100	174	144	80	100	M20	40	50	600	12
						60	90	1080	12
						70	145	1740	12
LM-124	215	177	64	124	M20	40	85	850	10
						60	140	1400	10
						70	220	2200	10
LM-152	232	190	80	152	M20	40	105	1260	12
						60	200	2400	12
						70	320	3840	12