

LH-M Hanger



LIVA-EP
利瓦环保

Feature:

- ★ Spring diameter shall be not less than 0.8 times the compressed height of the spring at the design load. Springs shall have a minimum additional travel to solid equal to 50 percent of the actual deflection.
- ★ With deflection scale .
- ★ Fail safe design.
- ★ Heavy wall construction.
- ★ Noise and vibration isolation.
- ★ Maintenance free.
- ★ Wide load range available.

Applications:

- ★ Hanging ceilings
- ★ HVAC ducting networks , Piping networks、 Fans、 Air handles

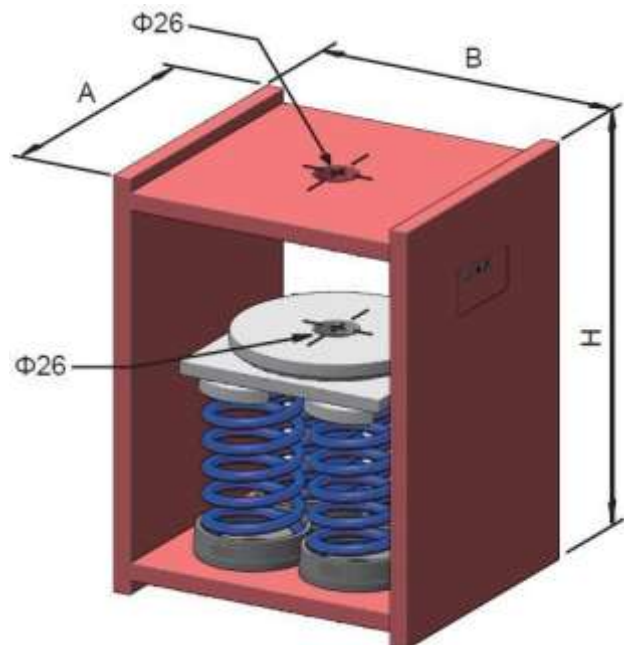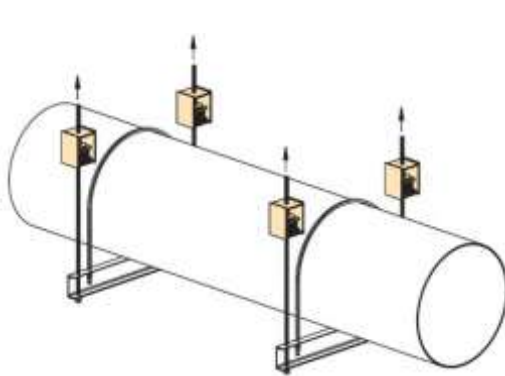

Type	(mm)		
	A	B	H
JH-2-M	100	220	290
JH-4-M	200	220	290

Type	Rated Capacity KG	Spring rate KG/mm	Rated Defl. mm	Color Code
LH-2-1200-M	1000~1200	48	25	Gray
LH-2-1400-M	1200~1400	56	25	Yellow
LH-2-1700-M	1400~1700	68	25	Khaki
LH-2-2000-M	1700~2000	80	25	Dark Green
LH-4-2400-M	2000~2400	96	25	Gray
LH-4-2800-M	2400~2800	112	25	Yellow
LH-4-3400-M	2800~3400	136	25	Khaki
LH-4-4000-M	3400~4000	160	25	Dark Green